

Fishing Rod Kit Instructions

You will need:

Drill bits: 17mm (11/16")


Fishing Rod Bushing

Drill, Tube & Square your blanks & mount on your mandrel



Turn your blank down to the bushings. Polish & finish blank

Lay out your parts based on the diagram below

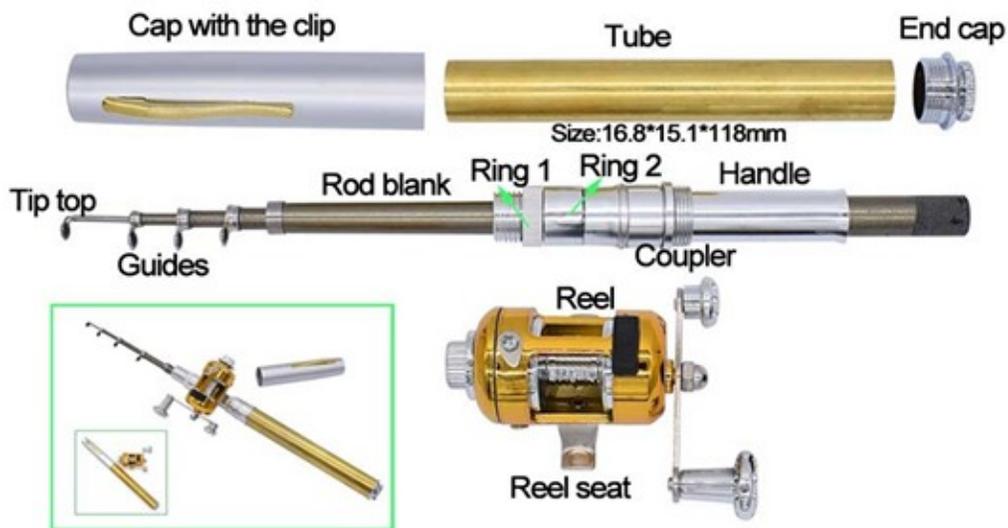

Assembling the pen

1. Screw the end cap into the end of the tube.
2. Screw the handle coupler into the opposite end of the tube.
3. Unscrew the ring 1, insert the reel seat assembly into the ring 2 and the opposite end of the coupler (there is the raised part on the surface), then screw the ring 1 to lock it well.
4. You could stretch the rod blank to the bottom as needed. When you don't use the fishing rod, you could remove the reel seat and close the rod blank. Push the cap into the whole handle.